
Outdoors Kiosk - **H3 Model**

CREATE CONVENIENT LIFE

Born to be outdoors.

15-inch
Windows

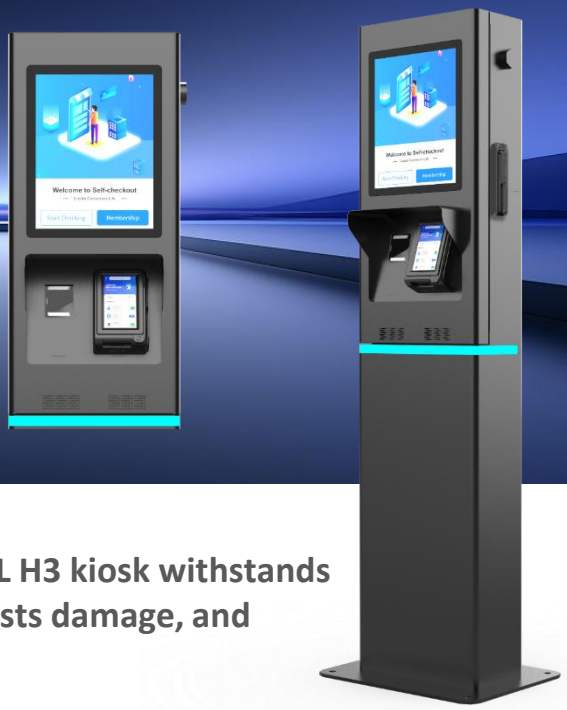

Reliable for outdoor payments and queries, the CCL H3 kiosk withstands extreme temperatures, ensures clear visibility, resists damage, and adapts to any site with easy installation.

Wide-Temperature Design

Operating range from -25°C to 40°C, IP55 dust and water resistant. Performs flawlessly in extreme cold or heat, rain or shine – 24/7 reliability for unattended service.

High-Brightness Screen

1800 nits' brightness with automatic ambient light adjustment. Crystal-clear under direct sunlight, comfortably dim at night – smooth and intuitive outdoor operation.

Rugged Protection

IP55 + IK08 dual protection – impact-resistant, damage-proof, and sealed against the elements. Long-term stability reduces maintenance costs and ensures peace of mind.

Flexible Installation

Supports floor-standing or wall-mounting. Minimalist design with LED status indicators. Easily fits plazas, parks, transit hubs, and other outdoor spaces.

Customizable payment terminal.



LED indicators for device status display.



Modular design for easy maintenance.



Base unit with independent door access for servicing.



Outdoors Kiosk - **H3 Model**

CREATE CONVENIENT LIFE

System	
Processor	Intel® Core™ i3 1115G4 2C/4T up to 4.1GHz 6M Intel® Core™ i5 1135G7 4C/8T up to 4.2GHz 8M
RAM	DDR4 4G / 8G / 16G/ 32G
Storage	M.2 128G / 256G / 512G
OS	Win 10 / Win11 / Linux
Power	
Power Supply	220-230VAC 50/60HZ, 465W
Display	
Type	15” IPS LCD
Resolution	1024 x 768, 4:3, 1000:1
Brightness	1800 nits
Touch	True-flat PCAP touch with multi-touch support, AG
I/O Ports	
Serial	6*RS232
USB	8*USB: 2*USB 3.0 + 6*USB 2.0
LAN	1*RJ45, 10 / 100 / 1000 Mbps
Display port	1*HDMI
Audio	N/A
Standard Components	
Scanner	International first-line barcode scanner, support 1D&2D and scanning cell phone screen
Light	RGB Color LED Indicator
Physical & Environmental	
Dimension (W x D x H in mm)	450 x 350 x 1541 (Floor-standing) 450 x 350 x 776 (Wall-mounting)
Netto Weight (in Kg)	74 (Floor-standing) 43 (Wall-mounting)
Certification	CE / RoHS / IP55
Color	Black
Operating Conditions	-25°C - 40°C, 5%RH - 95%RH
Storage Conditions	-40°C - 60°C, 5%RH - 95%RH



CE RoHS

IK08

Disclaimer: The product information and specifications are subject to change without prior notice

Qingdao CCL Technology Co., Ltd.
Building D2, Floor 26, International Innovation Park
Laoshan District, Qingdao
China

CCL Tech SAS
29, Boulevard de la Paix
78100 Saint-Germain-en-Laye
France